

# OptiXstar T823E-X Datasheet

Case-shaped Industrial ONU

Date: 2021-03-15

## Product Overview

The OptiXstar T823E-X is industrial ONU in Huawei's industrial optical network solution. The network side provides two XGS-PON upstream ports, and the user side provides eight GE Ethernet ports and supports PoE++. With high-performance forwarding capabilities, the device provides ideal network solutions for various industrial scenarios, such as transportation, public safety.



## Product Highlights

- Industrial-grade design, high reliability, and high protection level
  - Dual XGS-PON upstream transmission
  - Type B/Type C service protection
  - Surge protection capability of 6 kV in common mode for the Ethernet port
- Easy deployment and O&M
  - Placed on an indoor desktop, installed in a 19 inch cabinet or network box
  - 8-port PoE++ power supply
  - Centralized management on eSight

## Technical Specifications

<b>Dimensions (W*D*H. Unit:</b>	250 * 180 * 43.6 (without	<b>System power</b>	DC 54 V to 57 V
---------------------------------	---------------------------	---------------------	-----------------

<b>mm)</b>	mounting ears) 482.6 * 180 * 43.6 (with 19-inch mounting ears)	<b>supply</b>	<b>NOTE</b> Huawei 240 W PoE AC power module PAC240S56-CN is recommended for the external power supply system.
<b>Weight</b>	About 2.5 kg	<b>Rated voltage and current</b>	DC 56V, 4.5A
<b>NNI</b>	1*XGS-PON SFP+ + 1*XGS-PON BOB	<b>Surge protection specifications</b>	Ethernet port: common mode 6 kV; differential mode 1.5 kV DC power port: common mode 4 kV; differential mode 2 kV
<b>UNI</b>	8*GE(PoE++) + 2*RS485/RS232 + 1*DI + 1*DO	<b>EMC</b>	Class A
<b>Static power consumption</b>	10 W (PoE port without PD)	<b>Heat dissipation mode</b>	No fans, natural heat dissipation
<b>Typical power consumption</b>	12 W (PoE port without PD)	<b>Operating temperature</b>	-40°C to +70°C
<b>Maximum power consumption</b>	15 W (PoE port without PD)	<b>Operating humidity</b>	5%RH to 95%RH (non-condensing)
<b>Maximum PoE output power consumption</b>	220 W (for total power consumption) 60 W (for every GE port power consumption)	<b>Protection Level</b>	IP40

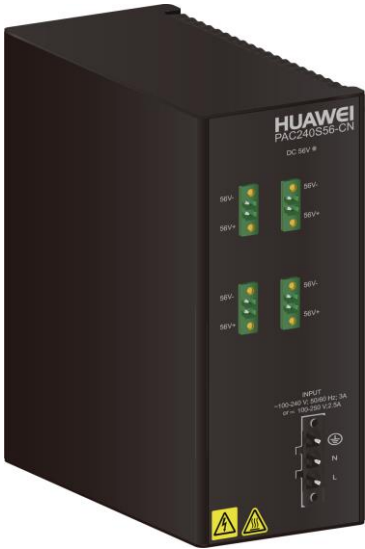
## Port Parameters

<p><b>NNI - XGS-PON Port (1*SFP+ + 1*BOB)</b></p> <ul style="list-style-type: none"> <li>Port type: SC/UPC</li> <li>Complying with ITU-T G.9807.1, Class N1/N2</li> <li>Transmission rate: RX 9.953 Gbit/s, TX 9.953 Gbit/s</li> <li>Maximum transmission distance: 20 km</li> <li>Optical receiver sensitivity: -28 dBm</li> <li>Overload optical power: -8 dBm</li> </ul> <p><b>NOTICE</b></p> <p>If the optical power is higher than the overload optical power, the equipment may be reset or damaged. In this case, please connect an optical attenuator.</p>	<p><b>UNI - GE Electrical Port</b></p> <ul style="list-style-type: none"> <li>Port type: RJ-45</li> <li>PoE++, complying with IEEE 802.3af, IEEE 802.3at, IEEE 802.3bt</li> <li>Auto ports speed(10/100/1000 Mbit/s)</li> </ul>
	<p><b>UNI - RS485/RS232 Port</b></p> <ul style="list-style-type: none"> <li>Port type: RJ-45</li> <li>RS485: complying with TIA/EIA-485, ITU-T V.24, ITU-T V.28</li> <li>RS232: complying with TIA/EIA-232, ITU-T V.24, ITU-T V.28</li> </ul>
	<p><b>UNI - DI/DO</b></p> <ul style="list-style-type: none"> <li>The DI is connected to devices such as the door status sensor, infrared sensor or other devices</li> <li>The DO is connected to the external alarm device or other devices</li> <li>DI/DO port type: RJ-45</li> </ul>
	<p><b>PWR Port - DC</b></p> <ul style="list-style-type: none"> <li>Port type: 2-pin Phoenix terminal</li> </ul>

# Function List

<p><b>Automatic Service Provisioning</b></p> <ul style="list-style-type: none"> <li>• Authentication exemption</li> <li>• XML/OMCI</li> </ul>	<p><b>Layer 3 Features</b></p> <ul style="list-style-type: none"> <li>• Default/Static/Policy/Service Route</li> <li>• VLAN binding</li> <li>• ALG/UPnP/ARP</li> <li>• DDNS/DMZ/DNS/NAPT</li> <li>• PPPoE/Static IP/DHCP</li> <li>• Port mapping/Port trigger</li> <li>• IPv6</li> </ul>	<p><b>Security</b></p> <ul style="list-style-type: none"> <li>• Filtering based on MAC/IP/URL</li> <li>• DoS/ARP anti-attacks</li> <li>• Web session number restriction</li> <li>• Device access control</li> <li>• 802.1x authentication modes: EAP-MD5, TLS, TTLS, and PEAP</li> <li>• Static MAC address binding</li> <li>• IPv6/IPv4 firewall</li> </ul>
<p><b>Network Protection</b></p> <ul style="list-style-type: none"> <li>• Type B Protection</li> <li>• Type C Protection</li> <li>• Ring network detection</li> </ul>		
<p><b>Multicast</b></p> <ul style="list-style-type: none"> <li>• IGMP v2/v3 snooping</li> <li>• Dynamic controllable multicast</li> <li>• IGMP Proxy</li> <li>• MLDv1/MLDv2 snooping</li> </ul>	<p><b>Smart O&amp;M</b></p> <ul style="list-style-type: none"> <li>• XML/Web UI</li> <li>• Centralized management on eSight</li> <li>• Rogue ONT detection and self-regulation</li> <li>• PPPoE/DHCP simulation testing</li> <li>• Serial port data collection and transmission</li> <li>• Transparent transmission of serial port data</li> <li>• High temperature alarm and shutdown</li> </ul>	<p><b>Layer 2 Management</b></p> <ul style="list-style-type: none"> <li>• DHCP Option82</li> <li>• PITP</li> <li>• BPDU transparent transmission</li> <li>• LLDP/LLDP-MED</li> </ul>
<p><b>QoS</b></p> <ul style="list-style-type: none"> <li>• Ethernet port rate limitation</li> <li>• 802.1p priority</li> <li>• SP/WRR/SP+WRR</li> </ul>		

## 240 W AC PoE Power Module Specifications

Item	Specification
<p><b>Appearance</b></p>	
<p><b>Input and Output</b></p>	<p>One power input:</p> <ul style="list-style-type: none"> <li>• 77 V to 300 V DC (Industrial terminal)</li> <li>• 90 V to 290 V AC (Industrial terminal)</li> </ul>

Item	Specification
	Four power outputs: <ul style="list-style-type: none"> <li>• 56 V DC (Industrial terminal)</li> </ul>
<b>power consumption</b>	240 W
<b>Weight</b>	1.47 Kg
<b>Dimensions (W*D*H)</b>	65 mm * 133 mm * 150 mm
<b>Storage temperature</b>	-40°C to +85°C
<b>Installation mode</b>	DIN guide rail mounting mode
<b>Operating temperature</b>	-40°C to +70°C
<b>Operating humidity</b>	5%RH to 95%RH (non-condensing)


Auxiliary list (delivered with the power module)

Item	Quantity	Description
AC power cable	1pc	<ul style="list-style-type: none"> <li>• Rated voltage: 250 V AC</li> <li>• Rated current: 10 A</li> <li>• Cable length: 1.0 m</li> </ul>
Single-wire cord end terminal	3pcs	<ul style="list-style-type: none"> <li>• Cable diameter: 1.5 mm<sup>2</sup></li> <li>• Insertion depth: 8 mm</li> </ul>

Copyright © Huawei Technologies Co., Ltd. 2021. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

**Trademarks and Permissions**

 HUAWEI and other Huawei trademarks are trademarks of Huawei Technologies Co., Ltd.

All other trademarks and trade names mentioned in this document are the property of their respective holders.

**Notice**

The purchased products, services and features are stipulated by the contract made between Huawei and the customer. All or part of the products, services and features described in this document may not be within the purchase scope or the usage scope. Unless otherwise specified in the contract, all statements, information, and recommendations in this document are provided "AS IS" without warranties, guarantees or representations of any kind, either express or implied.

The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute a warranty of any kind, express or implied.

**Huawei Technologies Co., Ltd.**

Address: Huawei Industrial Base Bantian,  
Longgang Shenzhen 518129 People's  
Republic of China

Website: www.huawei.com